



Technical data sheet TDS0057

PREMIER CARBON DIOXIDE INFRARED SENSOR CERTIFIED VERSION ppm CO2 RANGE TYPE MSH-P-CO2



	Patent Numbers
Great Britain	GB 2 401 432 & GB 2 403 291
Europe	EP 1544603 & EP 1818667-Pending
France	EP [FR] 1544603
Germany	EP [DE] 1544603
Italy	EP [I] 11544603
Switzerland	EP [CH] 1544603
USA	7, 244, 939
	Other World Patents Pending

ATEX Certificate No. SIRA 04ATEX1357U,  I M2 EExd I aI  II 2 G EEx d IIC

IECEX Certificate No. SIR 05.0053U, Ex d I and/or Ex d IIC

UL recognised Class 1, Groups A, B, C and D, T4 with 60°C ambient

FEATURES

- ★ Contains all the necessary optics, electronics and firmware to provide a linearized, temperature-compensated output.
- ★ Choice of output format – direct pellistor replacement, industry standard 0.4 to 2 volts dc or digital.
- ★ Provides the option to convert existing compatible pellistor-based instruments to infrared Carbon Dioxide.
- ★ Sensors can be factory configured to customer specification.
- ★ All sensor types are user configurable using configuration equipment available from Dynamant.
- ★ Fast track route for original equipment manufacturers to introduce the latest infrared technology – without any specialist knowledge.
- ★ Internal Flash memory allowing sensor firmware updates via configuration equipment.



Dynamant Limited

Premier House · The Village · South Normanton · Derbyshire · DE55 2DS · UK.

Tel: 44 (0)1773 864580 · Fax: 44 (0)1773 864599

email: sales@dynamant.com · www.dynamant.com

DESCRIPTION

Dynamant infrared sensors operate by using the NDIR principle to monitor the presence of target gas. The sensor contains a long life tungsten filament infrared light source, an optical cavity into which gas diffuses, a dual temperature compensated pyroelectric infrared detector, an integral semiconductor temperature sensor and electronics to process the signals from the pyroelectric detector .

Two versions are available:-

3 Pin Version - Pellistor Replacement Infrared

These sensors provide a pellistor style linearized, temperature-compensated output as shown in Graph 1.


They can either be supplied pre-set to customer specification or may be configured by the user by means of a configuration unit available from Dynamant Ltd. The output signal can be set to rise or fall with increase in the gas level.

5 Pin Version - Multi-Purpose Range

This version of the sensor provides maximum user flexibility by providing the following output options:-


- ★ Industry Standard 0.4 to 2 volt linearized, temperature-compensated output as shown in Graph 2, or alternative voltages for zero and FSD outputs.
- ★ Digital output for direct communications with instrument electronics.
- ★ Rising or falling output with increasing gas level.

The digital output is a UART format comprising 8 data bits, 1 stop bit and no parity. Refer to specification for available baud rates.

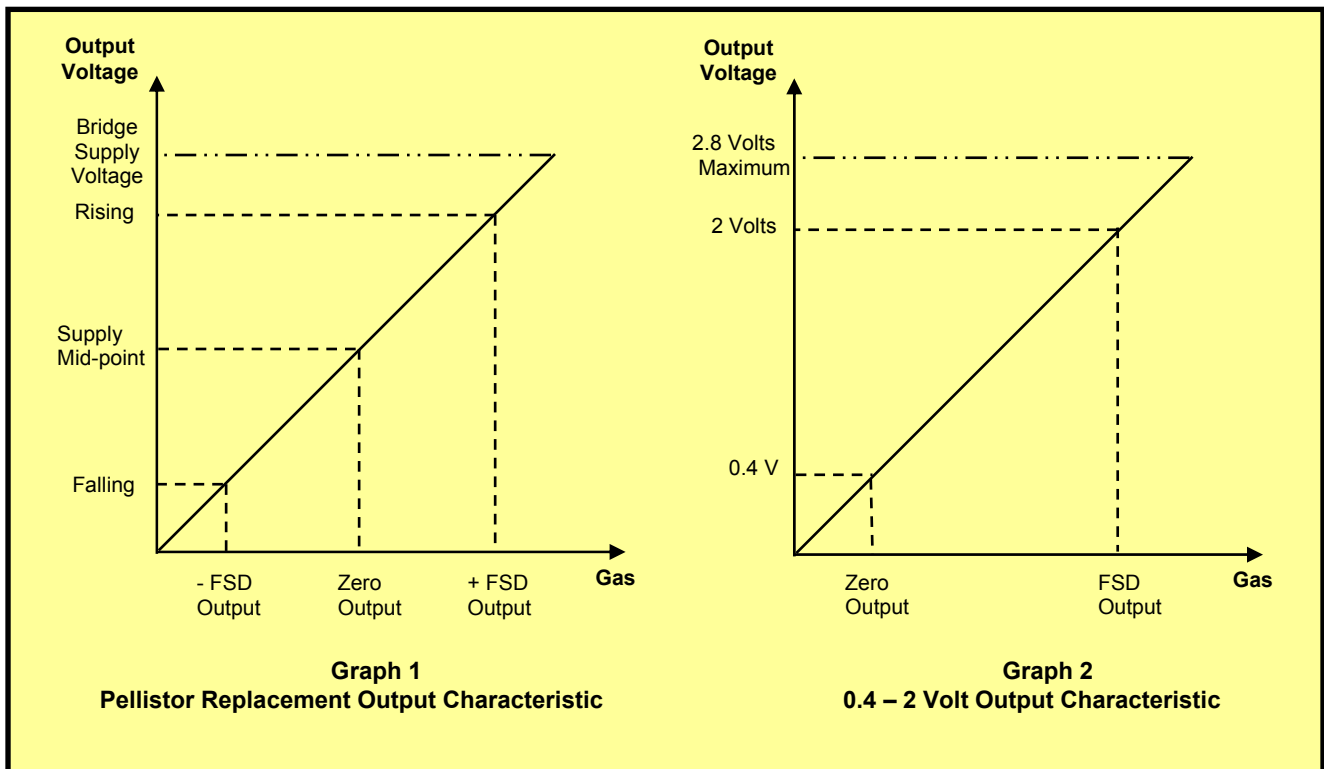

Carbon dioxide Temperature Compensation


The Premier sensor is temperature compensated over the range of -20°C to +50°C. The output variation is $\pm 2\%$ FSD or $\pm 10\%$ of the reading up to 50% FSD and $\pm 15\%$ of the reading from 50% to 100% FSD, which ever is greater.

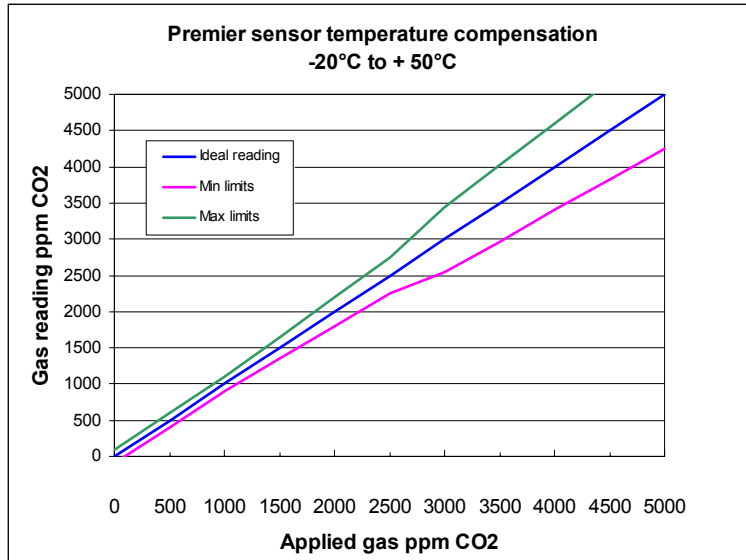

Carbon dioxide Linearity

The Premier sensor linearity at ambient temperature is $\pm 2\%$ FSD or $\pm 10\%$ of the reading which ever is greater.

The following graph is based on the 0 - 5000 ppm sensor, data for 24 sensors.

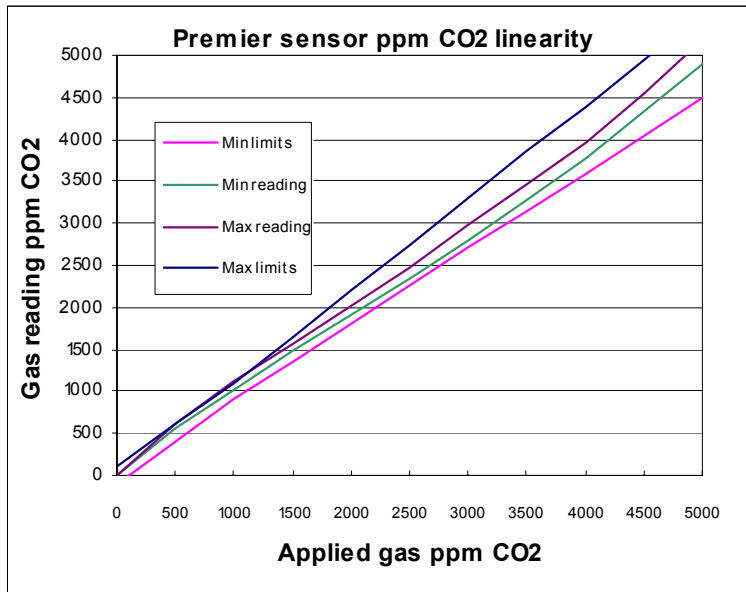

Sensor warm-up time

When power is first applied to the sensor, the voltage at the output pin is held at a pre-determined level. The default setting for this start-up value is the “zero gas” value. This condition is maintained for a default “warm-up” time of 15 seconds, after this time the output voltage represents the calculated gas value. Sensors can take up to 1 minute to indicate the correct gas reading.

Note: the sensor can output any reading from -100% FSD to +200% FSD in the first minute. The output value that is read using the communications pins is always held at zero during the “warm-up” time.

Both the voltage at the output pin during the “warm-up” time, and the duration of the “warm-up” time can be pre-programmed to alternative values at the time of ordering sensors.

Sensor fault indication

The sensor constantly performs checks on the internal memory contents, the incoming supply voltage and the analogue signal values. These checks are used to ensure that the sensor is operating within its correct parameters, and that no internal faults have developed.

If a fault condition is detected, the output value is set to -100% FSD. In the case of a sensor with a voltage output that is scaled, 0.4 – 2.4V, for example, the output will be set to 0V under fault conditions

It is not recommended to choose an output voltage of 0V for zero-gas, because the fault condition cannot then be distinguished from the zero-gas condition.

The output value that is read when using the communications pins, instead of the voltage output pin, will be set to -100% FSD under fault conditions.

As mentioned in the “Sensor warm-up time” section above, the voltage at the output pin during the warm-up time can be specified when ordering sensors. It should be noted that if a start-up voltage is chosen that represents the zero-gas condition, then should a fault subsequently develop leaving the sensor unable to drive the output to -100% FSD, this condition cannot be detected by the host instrument.

The start-up voltage that is equivalent to zero-gas was chosen as the default setting because, in a large number of applications, the host instrument would otherwise indicate fault during the warm-up period.

Temperature transients and gas flow rates.

The Premier sensor employs a pyroelectric detector, the output from which can be disrupted by sudden changes in temperature. If there is an excessive change in the ambient temperature, gas sample temperature or flow rate, then the output signal will be momentarily frozen. Correct operation is restored when the effects of the transient have settled. Rates of change in the ambient temperature should be restricted to 2°C/minute and gas flow rates kept below 600 cc/minute.

Power supply considerations

The sensor power supply rise time must be less than 50 mS to ensure correct operation. Operation outside the range of 3 – 5 V dc will result in either fault indication, or the sensor will not function correctly.

Sensor over-range condition


The sensor will continue to provide an output up to 200% of the full scale value; at this point the reading is clamped, regardless of any further increase in detected gas level. The linearity of the output is only guaranteed up to the full scale for the sensor; the over-range condition should therefore be determined and indicated by the host instrument.

SPECIFICATION

Operating Voltage Range:	3.0 – 5.0 V d.c.
Operating Current:	Constant current operation, current range 75 – 85mA
Programmable Output Voltage Ranges:	Voltage Output Types – 0v to 2.8 volts d.c. Bridge Output Types – 0v to Bridge Supply Voltage
Measuring ranges / Resolution:	0 – 500 ppm / 10 ppm resolution from 0 to 250 ppm, then 20 ppm up to full scale 0 – 1000 ppm / 20 ppm resolution from 0 to 500 ppm, then 40 ppm up to full scale 0 – 2000 ppm / 50 ppm resolution from 0 to 1000 ppm, then 100 ppm up to full scale 0 – 5000 ppm / 50 ppm resolution from 0 to 2500 ppm, then 100 ppm up to full scale 0 – 10,000 ppm / 100 ppm resolution from 0 to 5000 ppm, then 200 ppm up to full scale
Warm up time:	To final zero $\pm 0.2\%$ of range : 1 minute @ 20°C (68°F) ambient
Response Time T₉₀:	<30s @ 20°C (68°F) ambient
Zero Repeatability:	$\pm 2\%$ of full scale @ 20°C (68°F) ambient
Span Repeatability:	$\pm 2\%$ of full scale @ 20°C (68°F) ambient
Long term zero drift:	$\pm 1\%$ of full scale / month @ 20°C (68°F) ambient
Operating temperature range:	-20°C to +50°C (-4°F to 122°F)
Temperature performance:	$\pm 10\%$ of reading up to 50% FSD and $\pm 15\%$ of reading from 50% to 100% FSD over the range -20°C to +50°C (-4°F to 122°F)
Storage temperature range:	-20°C to +50°C (-4°F to 122°F)
Humidity range:	0 to 95% RH non-condensing.
Digital signal format:	8 data bits, 1 stop bit, no parity, 2.8V logic level
Standard baud rates:	38,400, 19,200, 9600
User configurable parameters:	Zero output voltage FSD output voltage Positive or negative going output Sensor 'zero' function Sensor 'span' function
MTBF:	> 5 years
Weight :	15 grams

MECHANICAL DETAIL

NOTES

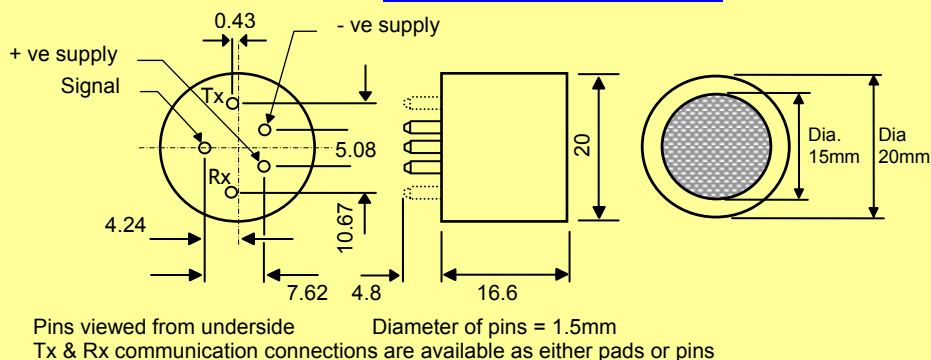

1. DIMENSIONS WITHOUT TOLERANCES ARE NOMINAL.
2. RECOMMENDED PCB SOCKET WEARNES CAMBION LTD CODE: 450-3326-01-06-00.
3. WEIGHT: 15g
4. USE ANTI-STATIC PRECAUTIONS WHEN HANDLING
5. DO NOT CUT PINS
6. DO NOT SOLDER DIRECTLY TO PINS

NOTE – The above pin configuration is shown for the POSITIVE version of the sensor. The NEGATIVE version has the +ve and –ve supply pin positions exchanged. See ordering details.

Dynamet reserve the right to alter technical specifications without prior notice

Ordering Details

In order to completely specify the type of sensor that is required, the customer needs to provide the following information:-


- An Order Code (see below) that specifies the sensors' basic physical and electrical characteristics.
- The sensor configuration requirements.

Available sensor options:

F = Replaceable, self adhesive microporous PTFE filter

EXAMPLE OF ORDER CODES

MSH – P / CO2 / 3 / B / P / F

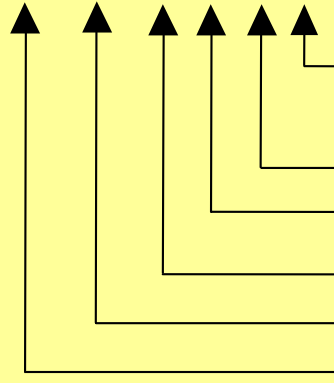

Option

FILTER : BLANK = OMITTED
F = FITTED

SUPPLY POLARITY : P = Positive
N = Negative

OUTPUT TYPE : B = Bridge
V = Voltage

NUMBER OF PINS : 3 or 5

GAS TYPE : CO2 = Carbon Dioxide


PREMIER SENSOR

CONFIGURATION OPTIONS


(To be stated on customer order in addition to the Order Code)

1. Output voltage for zero.
2. Output voltage for span.
3. Rising or falling output voltage with increasing gas level.
4. Sensitivity
5. Communication speed – 38,400 baud (default), specify alternative rate if required.

Conversion of Pellistor-Based Instruments to Measure Carbon Dioxide - Explanation of Positive & Negative Polarity




Typical Pellistor Pinout



Premier Negative Polarity Option

Use where the DET pin of the existing pellistor is connected to the Negative of the pellistor bridge supply.



Premier Positive Polarity Option

Use where DET pin of the existing pellistor is connected to the Positive of the pellistor bridge supply.

Note – On the 3 pin version of the sensor, the RX and TX connections are pads, not pins.