




3HYE Hydrogen CiTiceL[®]

Performance Characteristics

Nominal Range	0-10 000ppm
Maximum Overload	20 000ppm
Expected Operating Life	Two years in air
Output Signal	0.003 ± 0.001 µA/ppm
Resolution	10ppm
Temperature Range	-20°C to +50°C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	0.006 % signal/mBar
T₉₀ Response Time	<70 seconds
Relative Humidity Range	15 to 90% non-condensing
Typical Baseline Range (pure air)	+2 to -150ppm equivalent
Maximum Zero Shift (+20°C to +40°C)	-150ppm equivalent
Long Term Output Drift	<2% signal loss/month
Recommended Load Resistor	10 Ω
Bias Voltage	Not required
Repeatability	2% of signal
Output Linearity	Linear

N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

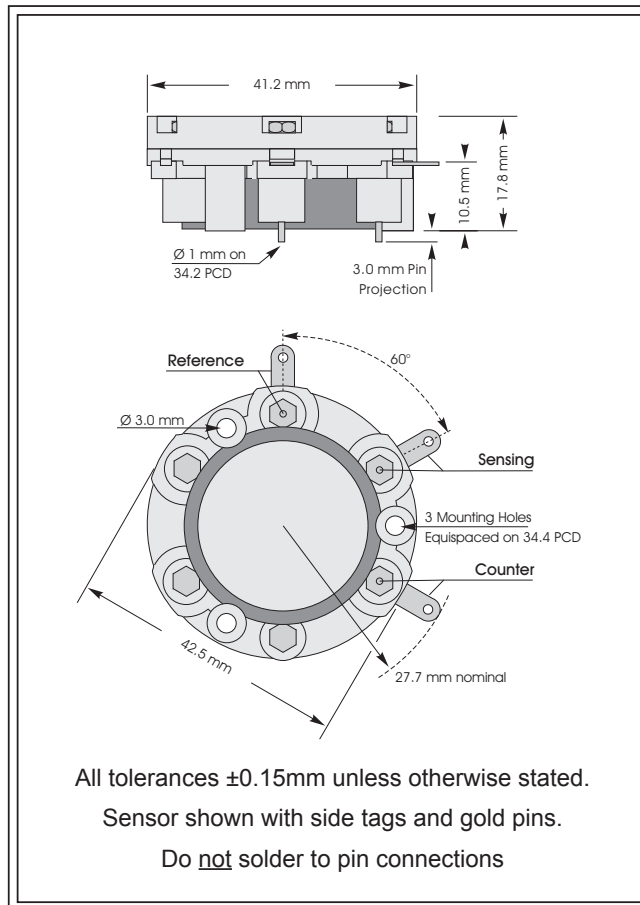

Physical Characteristics

Weight	22g
Position Sensitivity	None
Storage Life	Six months in CTL container
Recommended Storage Temperature	0-20°C
Warranty Period	12 months from date of despatch



Cross-sensitivity Data

CiTiceLs may exhibit a response to certain gases in a sample other than the target gas. 3HYE CiTiceLs have been tested with a number of commonly cross-interfering gases and the results are given below. The table shows the typical response to be expected from a sensor when exposed to a given test gas concentration (relevant to safety, e.g. TLV levels).

Gas	Conc.	3HYE	Gas	Conc.	3HYE
Carbon monoxide:	300ppm	<120ppm	Chlorine:	1ppm	0ppm
Hydrogen sulphide:	15ppm	≈10ppm	Hydrogen cyanide:	10ppm	≈10ppm
Sulphur dioxide:	5ppm	0ppm	Hydrogen chloride:	5ppm	0ppm
Nitric oxide:	35ppm	<10ppm	Ethylene:	100ppm	≈40ppm
Nitrogen dioxide:	5ppm	0ppm	**For details of other possible cross-interfering gases contact City Technology.**		

Ordering Information

The 3HYE Hydrogen CiTiceL is available with side tags, gold-plated PCB pins, or both PCB pins and side tags. To ensure the appropriate option is supplied care must be taken to provide the correct code when ordering.

Type 3HYE:- With side tag and PCB pin connections - **3HYE**
 With side tag connection - **3HYE(S)**
 With gold-plated PCB pin connection - **3HYE(G)**

SAFETY NOTE

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.