

Technical Data

Gas sensor

GG5: Single sensor

Type of sensor

1: Universal sensor with a wide range of applications, especially suitable for the leak detection of combustible gases.

Chip

3: Size = $(3.0 \times 3.0) \text{ mm}^2$

Heater resistance at 0 °C

3: $R_{H0} = (10.0 \pm 0.5) \Omega$


Class of accuracy

0: $R_{S0} = \pm 75 \%$, $R_S/R_{S0} = \pm 30 \%$

Housing

T: Sensor in a TO39-housing with a stainless steel cap

Dimensions

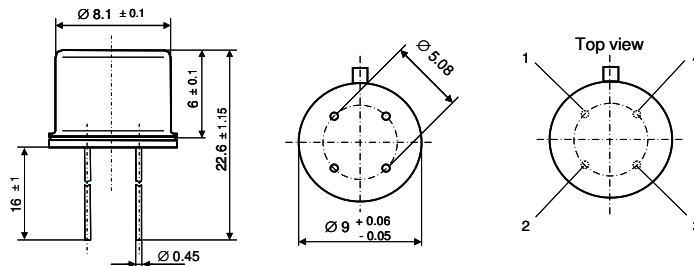

Pin assignment

Pin 1, 4 ... Heater; Pin 2, 3 ... Sensitive layer

Operating parameters

Temperature $T_H = (450 \pm 15) \text{ }^\circ\text{C}$

Heater resistance $R_H = (26.4 \pm 1.3) \Omega$

Power rating $P_H \approx 960 \text{ mW}$ (Heater voltage $U_{Hstat} = 5.0 \text{ V}$)

Sensor parameters

Basic resistance $R_{S0} = (50 \pm 35) \text{ k}\Omega$

Conformity

2002/95/EC Restriction of the use of Hazardous Substances Directive (RoHS)

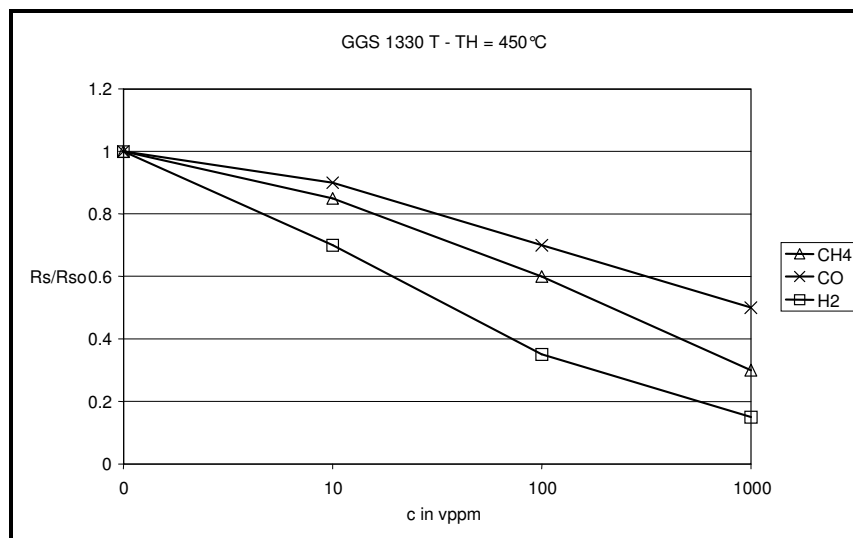


Figure 1: Sensitivity characteristics to impact at CH₄, CO and H₂

Made in Germany



ISO/TS 18949:2002
Reg.-Nr.: 70 111 8847