

HYDROGEN SULFIDE 4SE 5V

Technical Specification

<i>Sensor Type</i>	SEC H ₂ S 500 4SE 5V
<i>Detectable Gases</i>	Hydrogen Sulfide
<i>PN single sensor</i>	01-34-20-02
<i>Measuring Principle</i>	Amperometric 3-electrode sensor
<i>Contact</i>	4 pin and socket connector (spacing 2,54 mm)




Standard Range	0 – 200 ppm
Lower Detectable Limit (LDL)	1 ppm
Maximum Range	500 ppm
MAK/TLV	10 ppm
Long Term Sensitivity Drift	< 1 % / month
Linearity at standard range	linear
Repeatability	> 98 % of signal
Zero Line	1 VDC
Sensitivity	9,6-24 mV/ppm
Signal Out	1 – 4,8 VDC
Adjusted	3 VDC = 200 ppm
Power Supply	8-24 VDC (10 mA @ 12 VDC)
Amplification	With trim potentiometer
Power On	LED signal green
Alarm	LED signal red
Response time at target level	
T50	< 20 s
T90	< 60 s
Sensor warm up time typically	10 min
Operating conditions	- 20°C ... + 60°C
	10 ... 95 % r. h.
Expected life time	3 years

To set Alarmsignal , you have to trim Potentiometer

HYDROGEN SULFIDE 4SE 5V Dimensional Drawing

Sensor dimensions without pins Ø 20,3 mm, Height 26,5 mm ± 0,15 mm tolerance

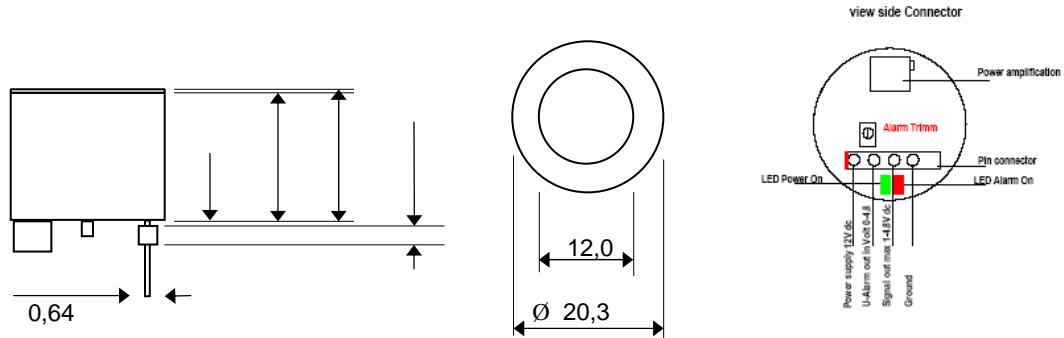

HYDROGEN SULFIDE 4SE 5V Temperature Dependence

Temperature compensated

HYDROGEN SULFIDE 4SE 5V Cross Sensitivity

Gas	Formula	Test Gas Concentration	Reading in ppm
Ammonia	NH ₃	25 ppm	0
Carbon Dioxide	CO ₂	5000 ppm	0
Carbon Monoxide	CO	50 ppm	3
Chlorine	Cl ₂	1.0 ppm	?
Hydrocarbons unsaturated	-	1 %	0
Hydrogen	H ₂	100 ppm	3
Hydrogen Sulphide	H ₂ S	10 ppm	10
Isopropanol	C ₃ H ₇ OH	1000 ppm	0
Nitric Oxide	NO	20 ppm	?
Nitrogen Dioxide	NO ₂	10 ppm	-2
Ozone	O ₃	0.5 ppm	?
Sulphur Dioxide	SO ₂	20 ppm	?

Note:

Test conditions at 20°C/ 1013 hPa, Flow Rate > 500 qcm/min
 Cross sensitivity gases are not target gases. Relation can change with aging.

SolidSense GmbH believes the data contained herein are factual, and the opinions expressed are of qualified experts regarding the results of tests conducted, the data are not to be taken as warranty or representation which SolidSense assumes legal responsibility. The data are offered solely for consideration, investigation, and verification. Any use of these data and information must be determined by the user to be in accordance with federal, state, and local laws and regulations. Specifications are subject to change without notice.

SolidSense GmbH - Felix-Wankel-Str. 5 - 82152 Krailling, Germany
Tel: +49 89 893 255 21 – Fax: +49 89 850 9374 – info@solidSense.de – www.solidSense.de